

**Easy** Effective Compactness



Quality illumination doesn't need a lot of light, it needs good light. Easy brings democracy to visual excellence by achieving colour rendering values of >90 and efficiency levels of >120 lm/W.

## Easy

### Effective Compactness.

Easy is a simple, compact and highly efficient downlight solution designed to upgrade existing systems. It is available in three diameters with heights of less than 10 cm, facilitating installation in false ceiling of any thickness. The general lighting version emits high performance diffused light - up to 125 lumens/W - thereby making a strong contribution to energy saving. The UGR <19 version is suitable for work environments. The Wall Washer solution provides asymmetric distribution

for uniform illumination of walls. Very high colour rendering is guaranteed with CRI values of >80 and >90. A screen completely protects the product to ensure IP54 safety rating. The reflector is available in two finishes - anti-scratch metal or white - and allows differential application depending on the intended use. Ideal in office and hospitality environments, Easy transforms excellence into simplicity.

**129**  
lm/W



**80**  
millimetres



**212**  
millimetres



# Overview

ø 96\*

up to W 118 lm/W



ø 153\*

up to 129 lm/W



ø 212\*

up to 128 lm/W



General Lighting  
White reflector

01 white



13 W - 1520lm  
118 lm/W

General Lighting  
Reflector in metallic-finish  
thermoplastic material

39 white/aluminium



13 W - 1575 lm  
112 lm/W

UGR<19  
(3000 cd m²)

39 white/aluminium



17 W - 2074 lm  
124 lm/W

Wall Washer

39 white/aluminium



17 W - 1495 lm  
113 lm/W




17 W - 2040 lm  
122 lm/W



17 W - 2160 lm  
129 lm/W



16,8 W - 2052 lm  
123 lm/W



26 W - 3096 lm  
128 lm/W



26 W - 3240 lm  
124 lm/W



26,3 W - 3024 lm  
17W - 1940  
115 lm/W



26,3,W - 3078 lm  
118 lm/W

## Info Box


\* mm / installation hole - W and lm refer to the system luminous flux



Easy

We have maximized the heat sink system and transformed it into a design element: the radial fins are grouped in a full, circular crown. Easy gets efficiency moving with style and personality.

scale 1:1  
ø 212 mm

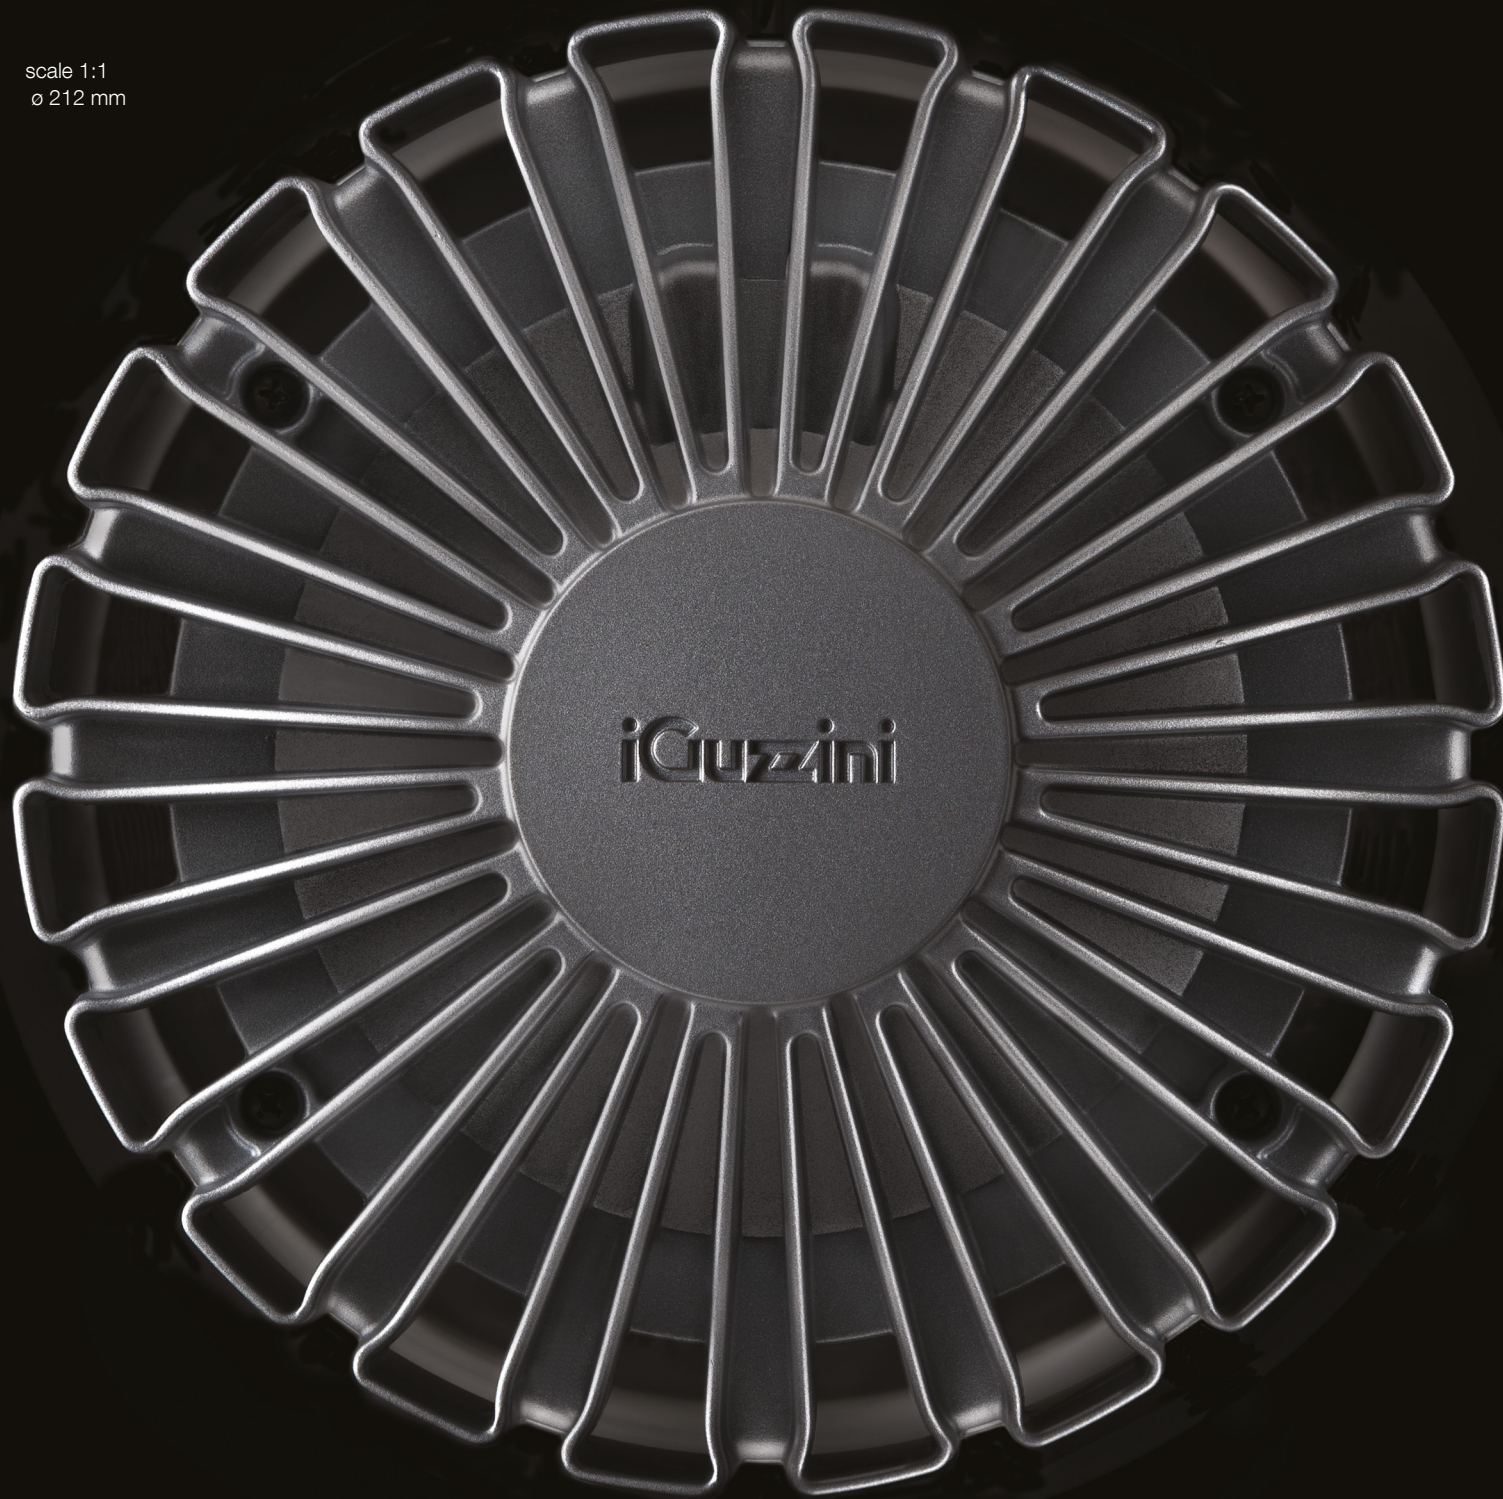

Easy

A little bit of everything.


Easy is the ideal solution for upgrading existing systems with ease. Conventional fluorescent or metal halide technologies can be upgraded with LED technology by replacing the 212 mm diameter downlights with the 153 mm diameter Easy mount and inserting a special adapter available as an accessory ring. Versions with Power over Ethernet (PoE) technology are available on request. In this case, the same cable carries both data

communications and power supply, thereby simplifying the wiring and connectivity system. Easy has IP54 requisites so that it can be installed even in settings with high humidity levels or near sprinkler fire extinguishers. The thermoplastic reflector is vacuum-metallised with aluminium vapours as well as anti-scratch treated and can therefore be cleaned without any risk of damage. Superb reliability over time.

#### PoE


The Power-over-Ethernet (PoE) technology is available on request for ø153 mm and ø212 mm. The PoE allows to receive

power and data over a single standard Ethernet cable, eliminating the need for separate power cabling.

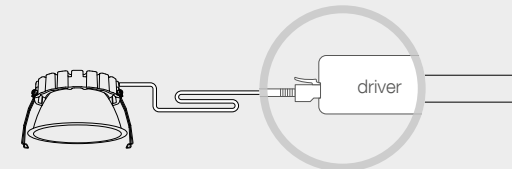

#### Easy replacing

It is possible to replace downlights with a diameter of 212 mm with an Easy model having a diameter of 153 mm by inserting an accessory ring.

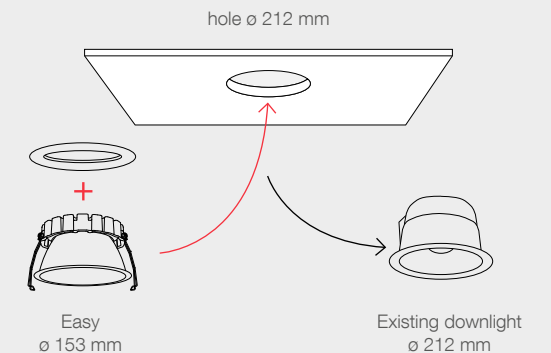

#### IP54

The product can be installed in areas with high humidity levels or with sprinkler systems.



#### Anti-scratch protection

Reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer.



